

KAWASAKI STEEL TECHNICAL REPORT

No.9 (March 1984)

Development of Heavy-wa II 2 1/4Cr-1Mo Forgings

Kazuo Aso, Hidefumi Tani, Takuichi Imanaka, Shingo Sato, Yoshifumi Nakano, Shinji Sato

Synopsis :

Generally, a 2 1/4Cr-1Mo steel is used as material for the pressure vessels of oil refining

Development of Heavy-wall $2\frac{1}{4}$ Cr-1Mo Forgings*

Kazuo ASO **

Hidefumi TANI **

Takuichi IMANAKA ***

Osaka Steel Works

Osaka Steel Works

Osaka Steel Works

and the like, with requirement for greater thickness, high strength, high toughness, and

and the like, with requirement for greater thickness, high strength, high toughness, and

0.10%Si-0.004%P
Equivalent thickness : 400 mm

$T(40)$

80 } ΔTT_{541} : Difference of TT_{541} between before
and after step cooling treatment
Tempering parameter : $20.8 \sim 90.6 \times 10^3$

[The remainder of the page is heavily obscured by horizontal black bars, making the text illegible.]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]


[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

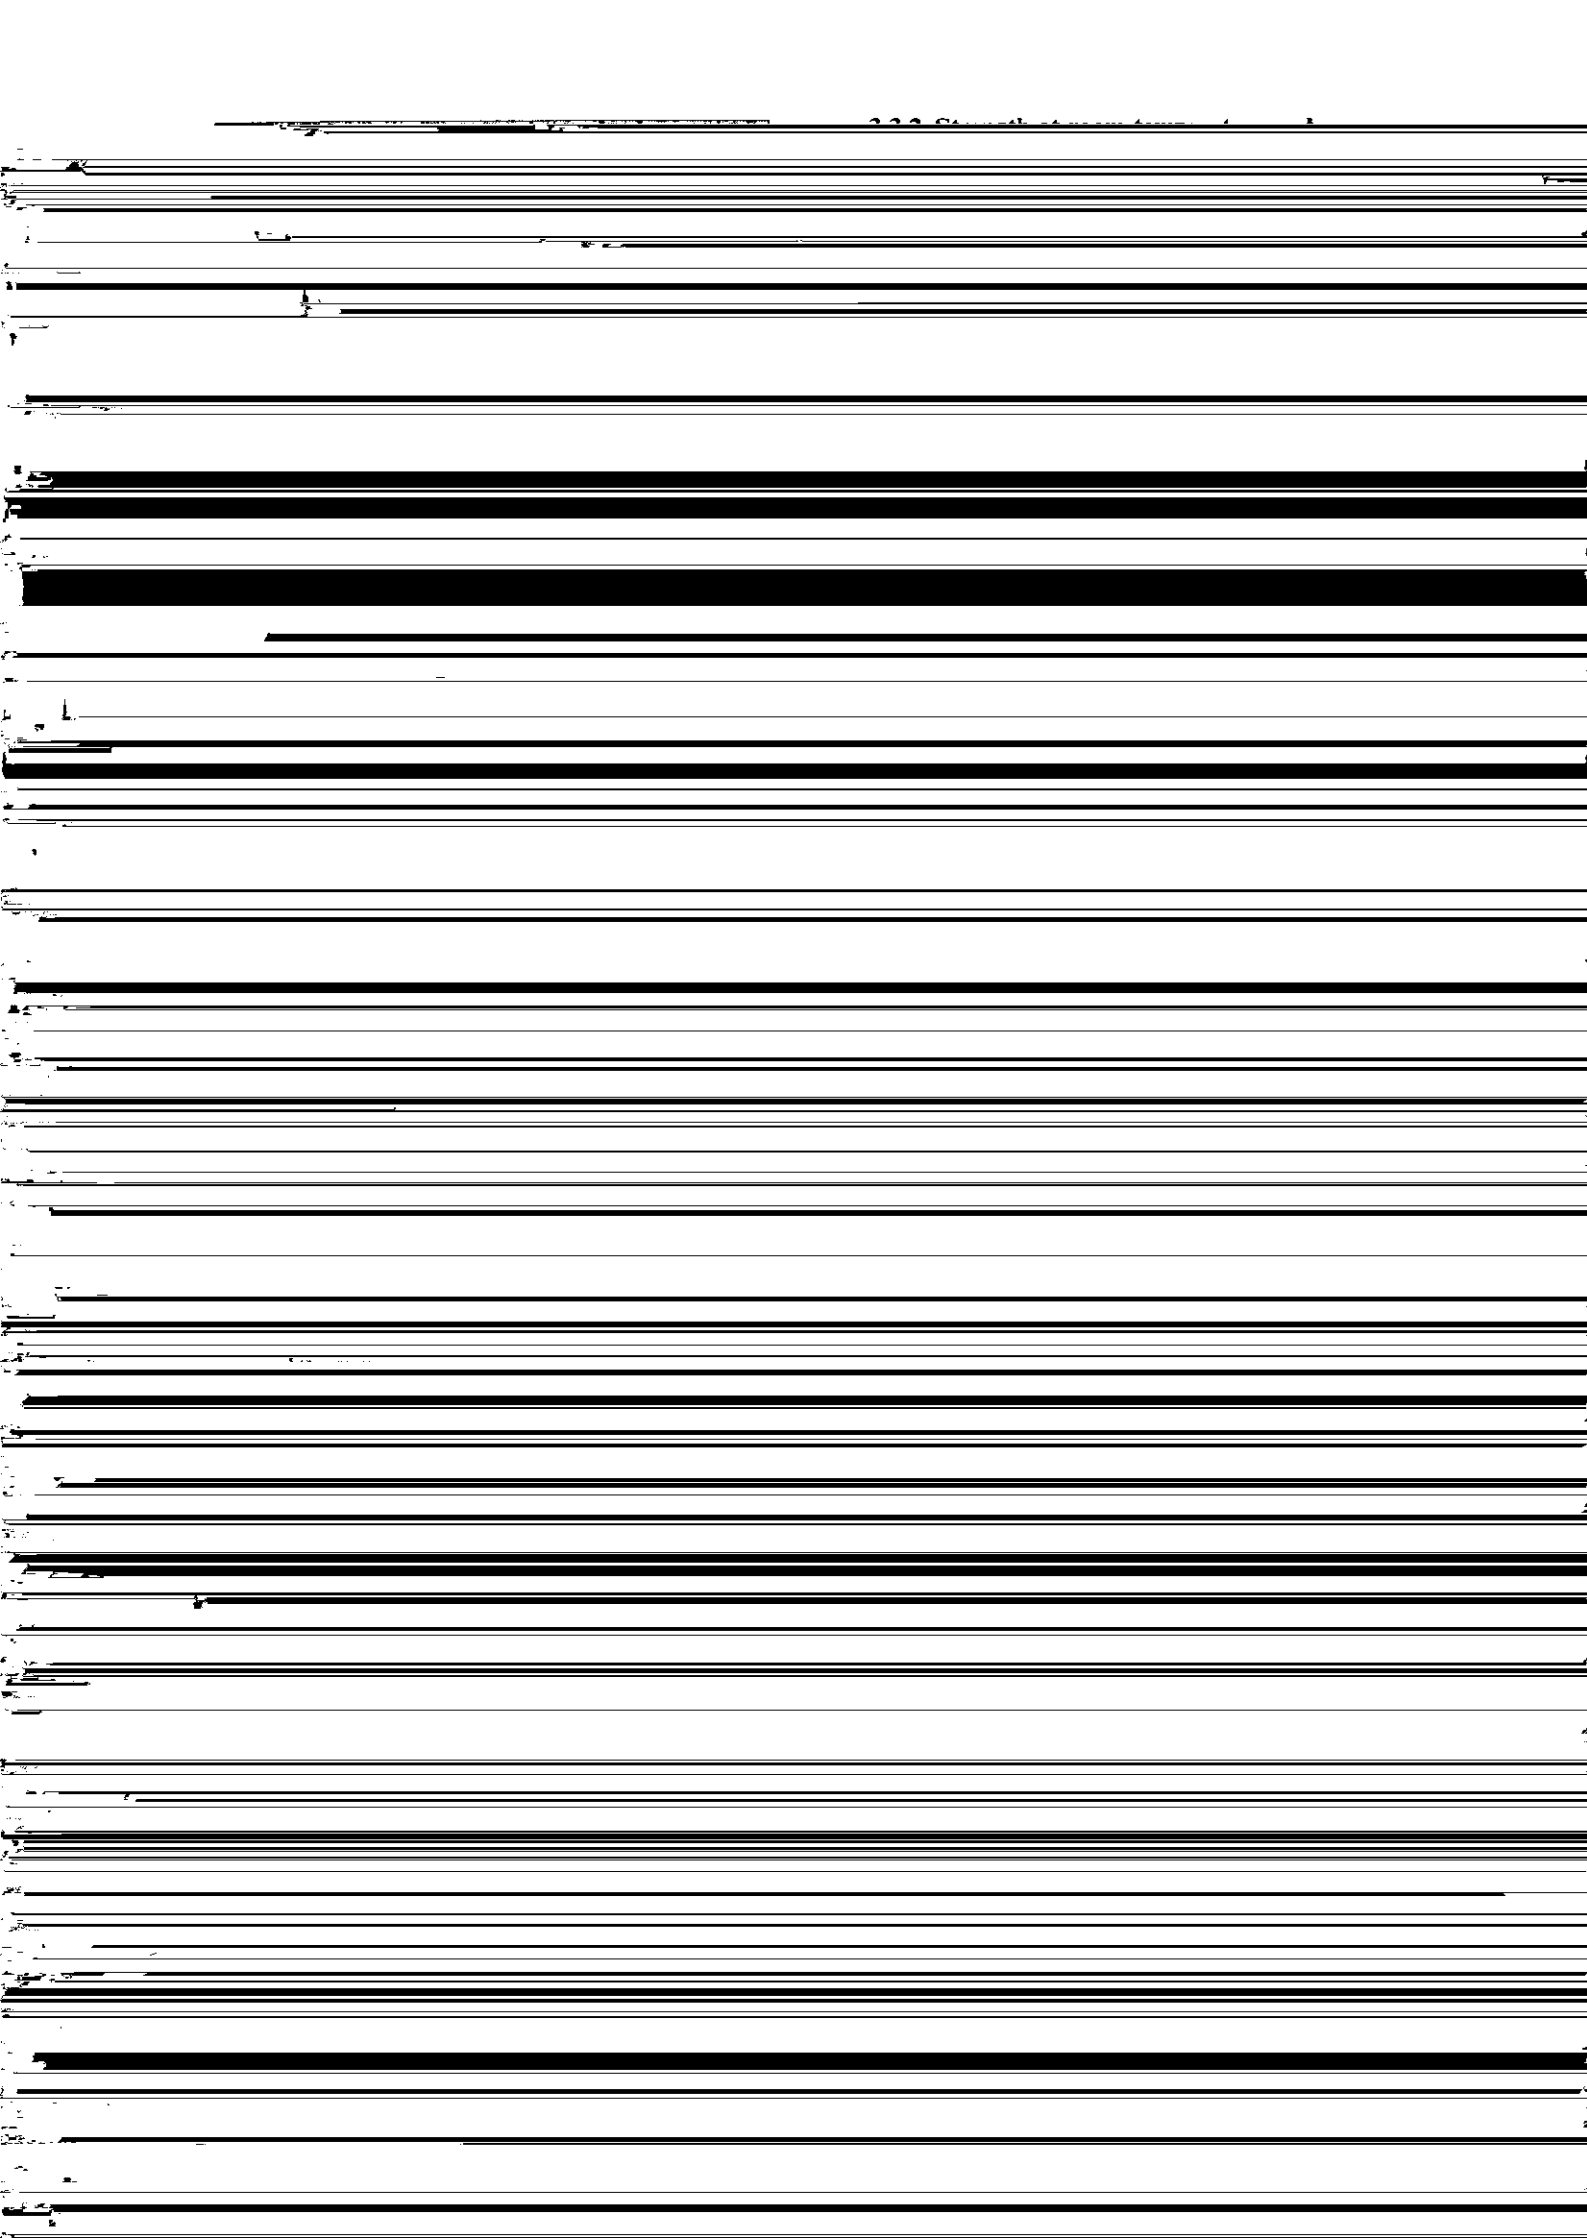

VIII Div. 1 is ensured when T.P. is 20.4×10^3 and less. Further, it is apparent from Fig. 10 that the

good as 80% and over.

kgf/mm² and over are ensured.

Figure 11 shows results of an investigation into creep

Figure 12 shows variations in toughness of the top and the bottom. Although some dependence on the

Figure 13 shows the relationship between toughness


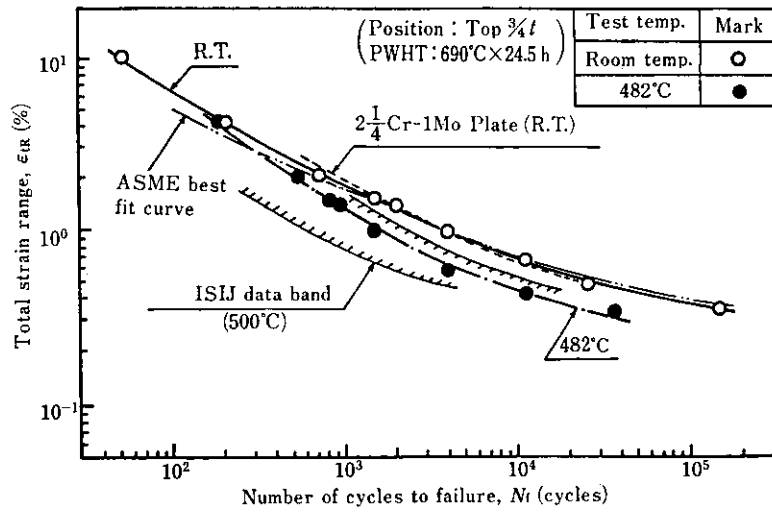


Fig. 17 Results of low cycle fatigue test of shell ring at room temperature and 482°C

with those obtained at room temperature, they are distributed on the upper part of the conventional data band⁷⁾. Furthermore, the data at 482°C are in good

the outer to the inner surface, and were immersed in an autoclave under a high-temperature high-pressure hydrogen atmosphere in order to conduct the hydrogen

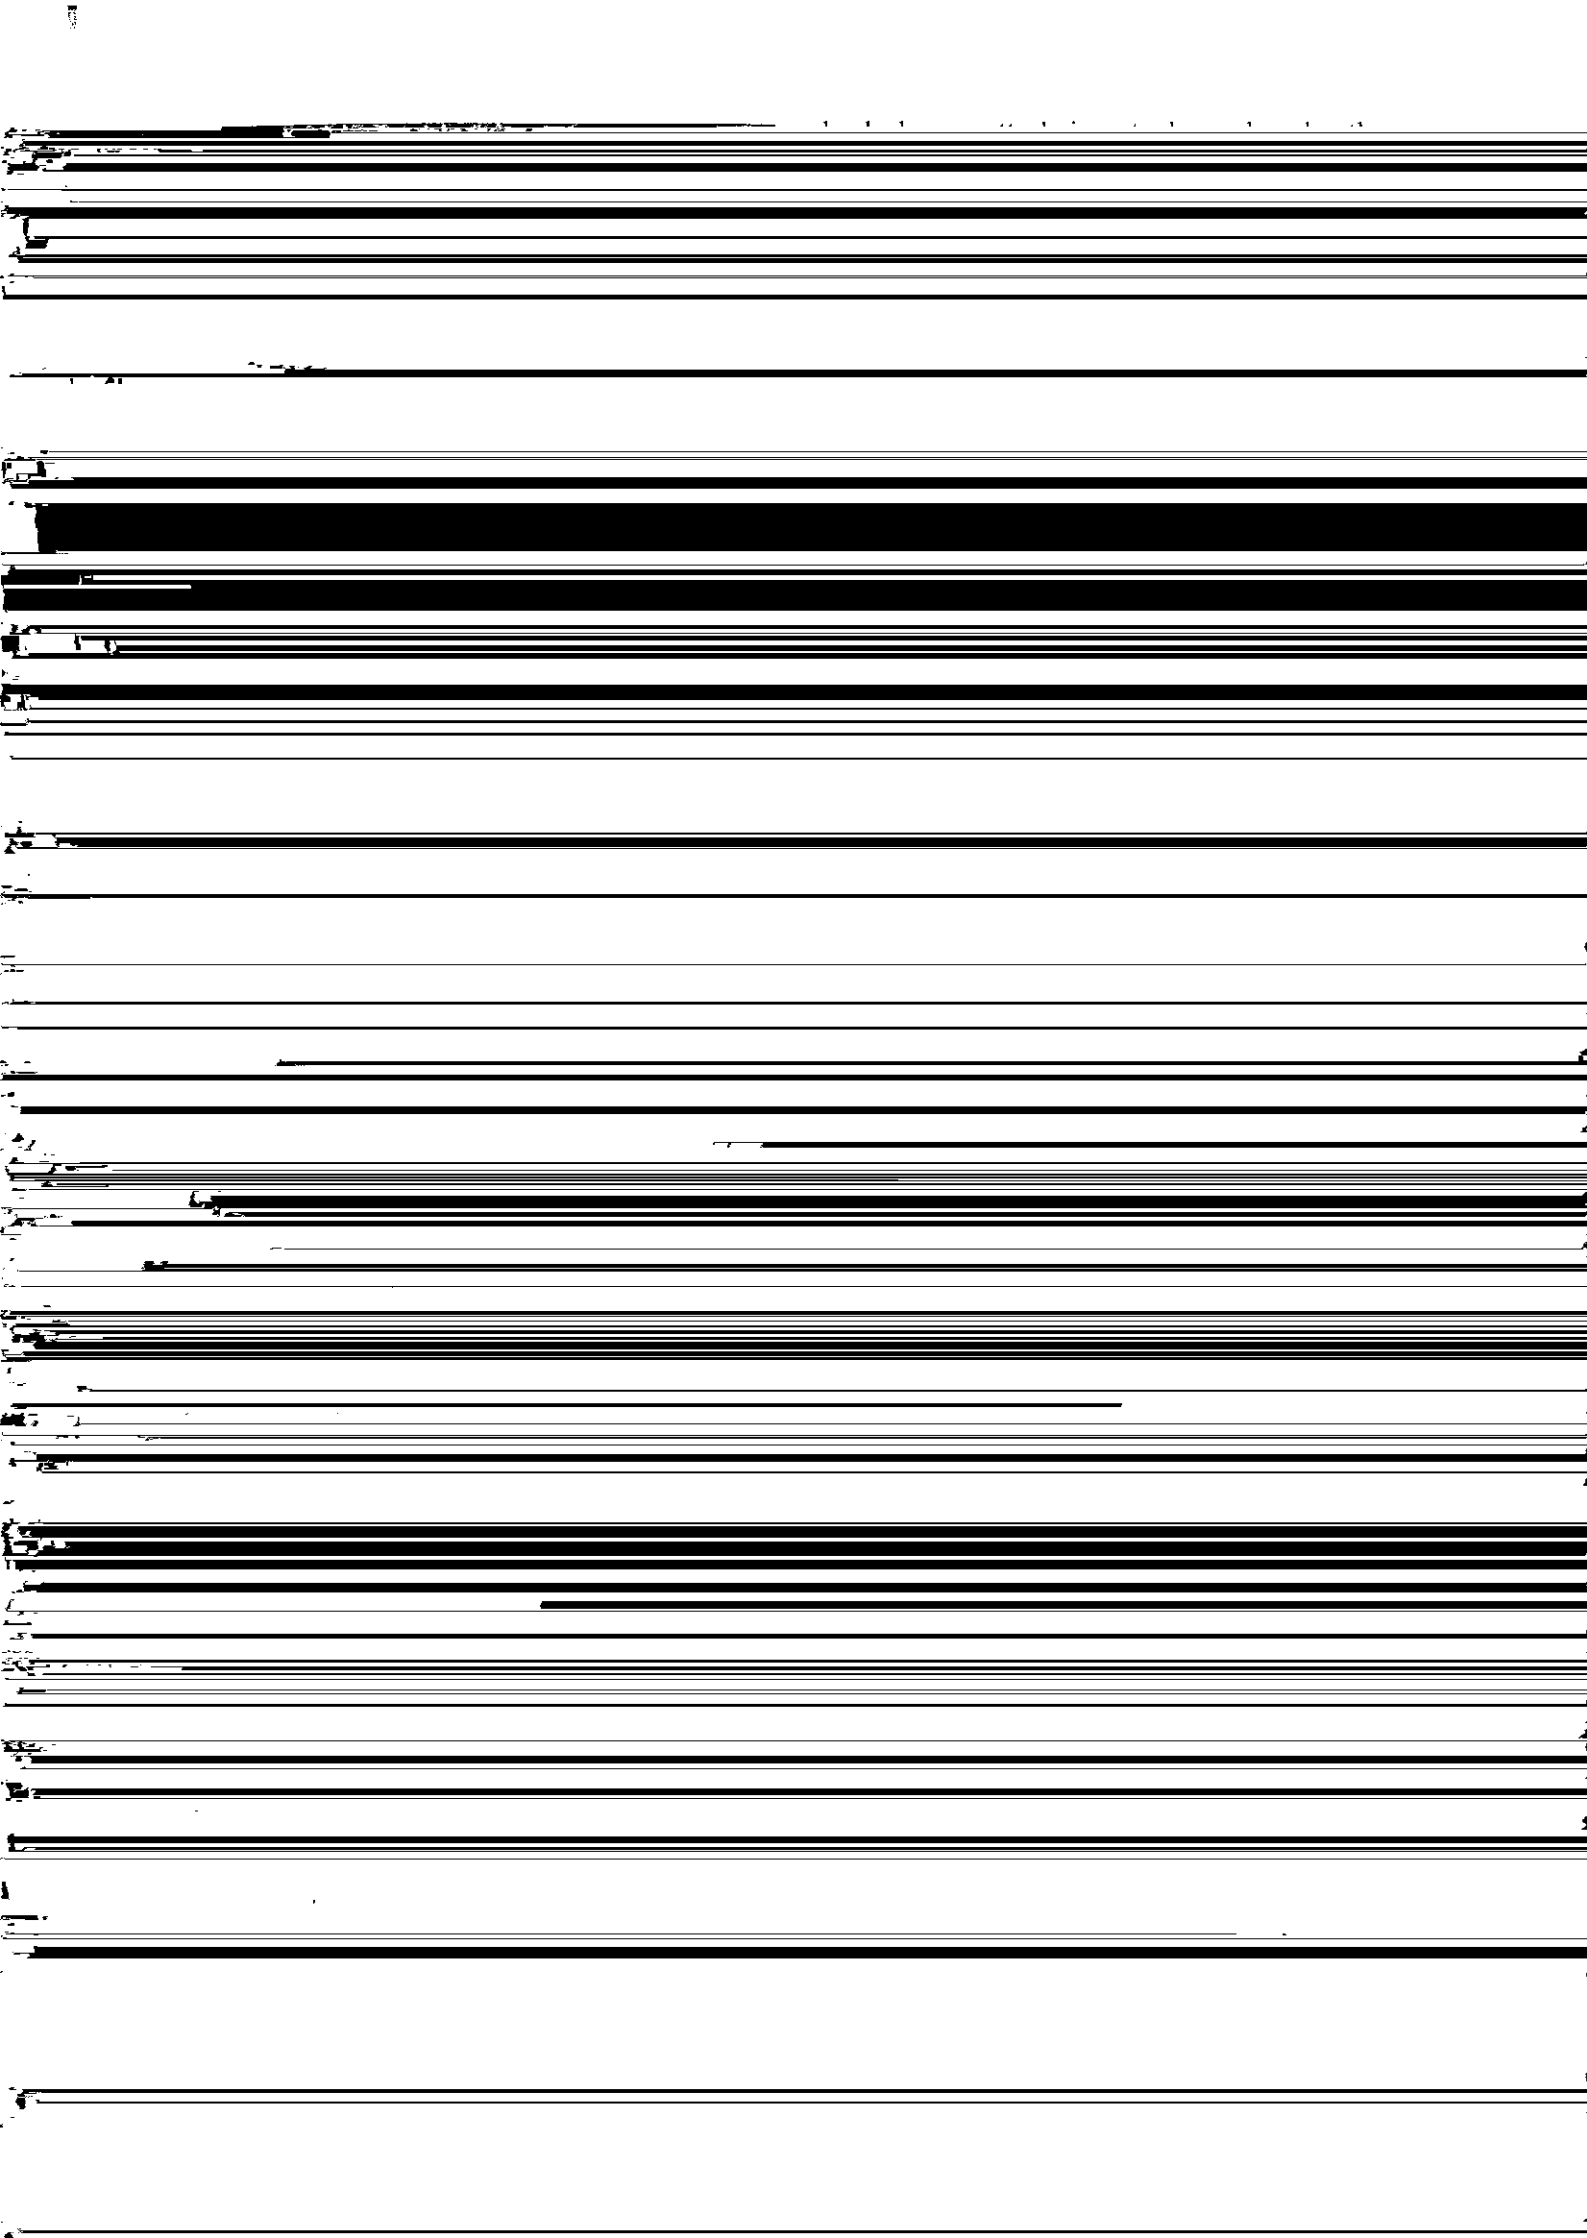

those of reactor vessel steel products produced from hollow ingots. Furthermore, the chemical composition of the part of the ingot near the hot top was analyzed to confirm the homogeneity of the whole ingot. As is evident from the results of this investigation shown in Fig. 20, almost the same tendency as in previous investigations is observed; that is to say, the segregation

EDX (energy dispersive X-ray spectroscopy)^{11-13). The X-ray intensity ratio of Cr and Fe in precipitates varies depending on the Si content. That is to say, it is apparent that Fe intensity is high at a high Si content, whereas Cr intensity is high at a low Si content. From results of electron microscopy, it is made clear that the proportion of Fe in carbides in-}

According to results of an investigation into the effect of Si on hydrogen attack by the authors^{12,15},

The authors are confident that the accumulation of these comprehensive data will lead to a stable manu-