

KAWASAKI STEEL TECHNICAL REPORT

No.41 (October 1999)

*Advances in Iron and Steel Technologies,
Commemorating the 30th Anniversary of
Technical Research Laboratories*

Recent Activities in Research of Coating

Kazuo Mochizuki


Synopsis :



Recent Activities in Research of Coating*

and a lubricating resin film with excellent press forma-

produces no waste during canmaking. A laminating line

CCT cycle : SST35°C → Dry60°C → Hum.98%RH
4h 2h 2h



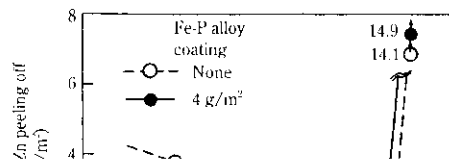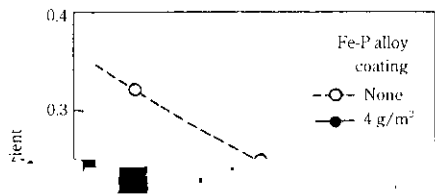

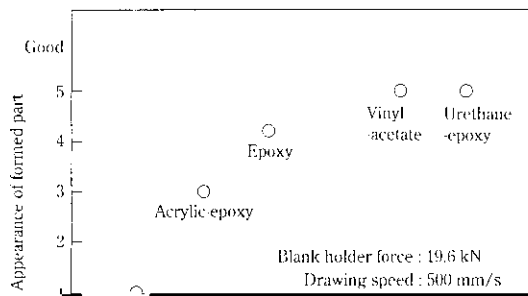


Table 1 Comparison of performance of self-lubricating steel

Property	RIVER ZINC FE	RIVER ZINC FS	RIVER ZINC FX
Surface electric resistance (Ω)	< 0.5	1~100	0.5
Number of electrode chip life for spot welding	> 3 000	150	> 3 000
Coefficient of friction by	0.15~0.25	0.10	0.35~0.45

layer, conversion film layer, and resin layer on a steel sheet. This sheet has L values of 12–15, and a low gloss

References